



Brinol[®]



0045-41444002



www.brinol.eu



info@brinol.com



Headquarters – Administration Taarnfalkevej 16 2650 Hvidovre, Denmark

Brinol®

01	ABOUT US	PG 03
02	MOTOR OILS FOR CARS AND LIGHT TRUCKS	PG 05
03	RACING CARS	PG 18
04	MOTORCYCLE OILS	PG 22
05	HEAVY DUTY & TRUCK INDUSTRIAL OILS AGRICULTURAL OILS	PG 29
06	HYDRAULIC OILS	PG 36
07	GEAR OILS	PG 40
08	BRAKE FLUIDS	PG 52
09	MARINE LUBRICANTS	PG 54
10	COOLANTS	PG 56
11	GREASES	PG 60
12	ADDITIVES	PG 62
13	BRINOL SPRAYS	PG 67



Brinol[®]

ABOUT US

brinol[®] is a european lubricant brand established in 2020, built on a foundation of quality, precision, and strong industrial partnerships. the company is headquartered in denmark, with sales and development operations based in germany, positioning brinol[®] at the center of european engineering and commercial excellence.

our production is carried out through strategic partnerships with iso-certified oil blending plants that hold api and oem approvals. this ensures that every brinol[®] product is manufactured under controlled conditions, meeting international specifications and the highest industry standards.

what sets brinol[®] apart is its proprietary formulations, developed in advanced german laboratories. these recipes combine modern technology with proven engineering expertise, resulting in lubricants that deliver consistent performance, durability, and protection across a wide range of applications.

brinol[®] offers a comprehensive portfolio covering industrial oils, diesel and hydraulic oils, marine and agricultural lubricants, as well as a full range of automotive engine oils. our focus is to provide top-tier quality while maintaining competitive pricing, making premium lubricants accessible across global markets.



OUR MISSION

our mission is to develop and deliver high-quality lubricants that meet eu standards and exceed customer expectations in performance, reliability, and value. through strong partnerships with manufacturers and distributors, brinol® is committed to providing consistent supply, technical excellence, and competitive solutions tailored for diverse industries. Brinol will endeavour to brand its name and accelerate its presence across all industries all over the globe through partnership and strong and liable distributors.

OUR VISION

our vision is to establish brinol® as a globally trusted lubricant brand, expanding across international markets through reliable distribution networks and long-term partnerships. we aim to be recognized for combining european quality, advanced formulation, and commercial competitiveness in every product we deliver.

brinol® – engineered in europe. trusted worldwide.



Brinol[®]

MOTOR OIL FOR CARS & LIGHT TRUCKS



Brinol[®]

ITEM NO. 1250.06

0W30

BRINOL FORMULA ENERGI C2 SAE 0W30



Brinol formula energi c2 0w30 is high performance, fully synthetic, low friction, multi-grade engine oil for all petrol and diesel passenger cars with and without turbo charger. brinol formula energi c2 0w30 has been blended with carefully selected and advanced additives to obtain best possible properties of the engine oil. low saps formula ensure long life of diesel particulate filter (dpf).

APPLICATION:

Brinol formula energi c2 0w30 is suitable for the energy saving operation all the year of all modern cars and vans with petrol and diesel engines.

KEY BENEFITS

- excellent cold starting performance even at low temperatures of below 45°C.
- low saps technology.
- excellent viscosity characteristics and shear stability.
- fuel savings under all operating conditions.
- very good detergent and dispersant characteristics.
- high and stable viscosity index.
- neutral against sealing materials.
- low evaporation tendency, thereby lower oil consumption.
- perfect protection against wear, corrosion and foaming.
- suitable for catalysts and dpfs.
- extended oil change intervals to protect natural resources.



SPECIFICATION RECOMMENDATION:

ACEA: C2

PSA: B71 2312

CHARACTERISTICS

UNIT DATA

colour	brown
density at 15°C	843 kg/m ³
viscosity at 40°C	54.9 mm ² /s
viscosity at 100°C	9.7 mm ² /s
flash point (COC)	205°C
pour point	-50°C
total base number	6.2 mg koh/g

Brinol®

ITEM NO. 1251.07

OW16

**ADVANCED FULL
SYNTHETIC MOTOR OIL**
FULLY SYNTHETIC SAE OW16



BRINOL OW-16 is a low viscosity, advanced full synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. Benefits to keep your engine running like new and protect critical engine parts for up to 10,000 miles between oil changes. BRINOL OW-16 meets or exceeds the requirements of the industry's toughest standards and outperforms our conventional and synthetic blend oils.

APPLICATION:

BRINOL OW-16 FULLY SYNTHETIC is engineered with a proprietary blend of high-performance synthetic base stocks fortified with a precisely balanced component additive system. The low viscosity, advanced full synthetic formulation helps to increase engine efficiency and improve fuel economy benefits, while providing outstanding overall engine protection.

SPECIFICATION RECOMMENDATION:

API SN
API SN PLUS
API SJ
API SL
API SM
API SN
API SN PLUS
API SP
ILSAC GF -6B

ITEM NO. 1252.07

OW20

**BRINOL PREMIUM
LONGLIFE IV OW-20**
FULLY SYNTHETIC SAE OW20



BRINOL Premium Longlife IV OW-20 is a highperformance low viscosity engine oil for VW engines. Its special formulation guarantees maximum thermal and mechanical stability and has a low tendency to evaporate. BRINOL Premium Longlife IV OW-20 provides the highest wear protection and impresses with excellent low-temperature properties. This ensures a fast oil supply at all lubrication points and reduces cold start wear to a minimum. In addition, highly effective dispersing additives prevent deposits on pistons and inlet valves.

APPLICATION:

BRINOL Premium Longlife IV OW-20 has been developed for the latest VW and Audi engines where VW specification 508 00 and 509 00 are required. This product is not backward compatible with VW 504 00/507 00 and other VW specifications.

CAN BE USED WITH

ACEA
C5
VW 508 00
VW 509 00
PORCHE C 20

Brinol®

ITEM NO. 1253.08

0W20-FE

BRINOL SUPER EXTREME
FULLY SYNTHETIC 0W-20FE



BRINOL Premium FE + 0W-20 is able to withstand all thermal and mechanical loads that can occur in modern car engines designed for fuel economy. A high cleaning and dirt holding capacity ensures enhanced engine cleanliness and best wear protection. BRINOL Premium FE + 0W-20 guarantees a fuel-saving potential and contributes to the protection of the environment by reducing CO2 emissions.

APPLICATION:

BRINOL Premium FE + 0W-20 is able to withstand all thermal and mechanical loads that can occur in modern car engines designed for fuel economy. A high cleaning and dirt holding capacity ensures enhanced engine cleanliness and best wear protection. BRINOL Premium FE + 0W-20 guarantees a fuel-saving potential and contributes to the protection of the environment by reducing CO2 emissions.

CAN BE USED WITH

BMW LONGLIFE-17 FE
CHRYSLER MS-12145
FIAT 9.55535-GSX
FORD WSS
M2C 947
GM DEXOS®D
JAGUAR LANDROVER
MB 229.71, 229.72
OPEL, VAUXHALL
OV0401547
VOLVO VCC RBSO-2AE

SPECIFICATION RECOMMENDATION:

ACEA C5
C6
API
SP
ILSAC
GF
6A

ITEM NO. 1254.08

0W20

BRINOL SUPER 0W-20
FULLY SYNTHETIC 0W-20



BRINOL Super 0W-20 is a HC-synthetic high-performance low-friction engine oil for petrol and diesel passenger cars. Base oils made with the latest synthesis technology and carefully chosen innovative additives are combined to produce a lubricant that exceeds today's requirements. Excellent cold start behaviour ensures optimum lubrication during the cold start phase. The product provides reliable protection under extreme conditions and high temperatures.

APPLICATION:

BRINOL Super 0W-20 is particularly recommended for use in the latest petrol and diesel passenger cars, where manufacturers prescribe a low-viscosity product.

CAN BE USED WITH

GM DEXOS® GEN 2
FORD WSS-M2C947
A
FORD WSS-M2C947
B1
CHRYSLER MS-6395
DAIHATSU
HYUNDAI
HONDA
KIA
ISUZU
LEXUS

MAZDA
NISSAN
SUBARU
SUZUKI
TOYOTA

Brinol®

ITEM NO. 1255.09

III OW30

**BRINOL OW30 PREMIUM
LONGLIFE III OW-30**

FULLY SYNTHETIC SAE OW30

1L
4L
5L
20L
60L
200L



1L
4L
5L
20L
60L
200L

BRINOL Premium Longlife III OW-30 is a premium high-performance engine oil especially developed for Volkswagen Group engines fitted to passenger cars and light commercial vehicles. The low SAPs formulation makes BRINOL Longlife III OW-30 ideally suited to engines fitted with exhaust aftertreatment devices.

APPLICATION:

BRINOL Longlife III OW-30 can be used in petrol and diesel engines and is especially designed for vehicles fitted with exhaust gas aftertreatment devices such as SCR and DPF. BRINOL Longlife III OW-30 is suitable for both extended and standard service intervals. For diesel engines BRINOL Longlife III OW-30 should only be used in with low sulphur fuel. BRINOL Longlife III OW-30 will mix with other oil but to gain the full benefit it is recommended to change the oil completely when changing to the BRINOL grade.

CAN BE USED WITH

BMW LONGLIFE-04
FIAT 9.55535-GS1, -DS1
MB-APPROVAL 229.51, 229.52,
229.31
PORSCHE C30
VW 50400, 507 00

ITEM NO. 1256.09

OW40

BRINOL SUPER OW-40
FULLY SYNTHETIC SAE OW40



Ultra-high performance and low fuel consumption formula, which greatly improves anti-wearing, heat resistance, sludge removal, and other performance indicators, enhancing the durability and protection of the engine. With excellent acceleration, ultra-low coefficient of friction, smooth and powerful horsepower output, allows the user to experience the pleasure of instant acceleration. Excellent fluidity and clean delivery process, quiet operation, light speed acceleration, reduced fuel consumption, and greatly improves fuel economy and durability.

APPLICATION:

suitable for most European, Japanese and Korean passenger & commercial vehicles with engine capacity under 2,000cc. Compatible with all naturally aspirated (NA) and turbo, gasoline/petrol or EU 4.5,6 diesel engines.

TECHNICAL CHARACTERISTICS:

Transforms to be strongest when the pressure is highest, protecting your engine. Reduces power-robbing friction across engine speeds and conditions. Independently tested at the highest standards for proven performance. Recommended by world-leading car manufacturers. Protects the engine for the entire drain interval even under extreme pressure.

CAN BE USED WITH

MB 229.3/226.5/
VW 502 00/ 505 00
BMW LONGLIFE-01
PORSCHE A40
RENAULT RNO700/
RN0710

Brinol®

ITEM NO. 1257.10

0W40

BRINOL SUPER PLUS OW-40

FULLY SYNTHETIC SAE OW40



Ultra-high performance and low fuel consumption formula, which greatly improves anti-wearing, heat resistance, sludge removal, and other performance indicators, enhancing the durability and protection of the engine. With excellent acceleration, ultra-low coefficient of friction, smooth and powerful horsepower output, allows the user to experience the pleasure of instant acceleration. Excellent fluidity and clean delivery process, quiet operation, light speed acceleration, reduced fuel consumption, and greatly improves fuel economy and durability.

APPLICATION:

Thanks to the latest Anti-friction technology, Super Motor Oil is able to form a more durable oil film that reduces the risk of rupture in friction pairs during high loads. The reduction of friction torque ranges from 35% to 60% at high loads. The temperature in the friction zone also reduces up to 36%.

CAN BE USED WITH

API: SP
ACEA: A3/B4/C3.
MB 229.31/229.51
VW 504.00/507.00
BMW LL-04
PORSCHE C30
GM DEXOS2

ITEM NO. 1258.10

5W20

**BRINOL SUPER 5 SUPER
5W-20W-20**

FULLY SYNTHETIC SAE 5W20



BRINOL Super 5W-20 motor oils are recommended by brinol for all types of modern gasoline-powered engines found in passenger cars, SUVs, light vans, and light trucks. BRINOL Super motor oils meet warranty requirements where an American Petroleum Institute (API) certified oil is specified. BRINOL Super is not recommended for 2-Cycle or aviation engines, unless specifically approved by the manufacturer.

APPLICATION:

BRINOL Super 5W-20 motor oils are synthetic blend oils formulated from high quality base stocks combined with modern performance additives to help provide long engine life and protect critical engine parts from lubricant related failures for up to 5,000 miles or your vehicle's OEM recommended oil change interval.

CAN BE USED WITH

GM DEXOS® 1 GEN 2	SUBARU
FORD	SUZUKI
WSS-M2C-945-B1	TOYOTA
WSS-M2C-960-A	
DAIHATSU	
HONDA	
HYUNDAI	
KIA	
ISUZU	
LEXUS	
MAZDA	
NISSAN	

Brinol®

ITEM NO. 1259.11

5W30

GREENCARGO

SAE 5W/30



BRINOL 5W30 Greencargo is a fully synthetic, fuelefficient, low-ash motor oil designed for heavy goods vehicles, utilizing the latest additive technology. It features Low SAPS, which means reduced sulfated ash, low phosphorus, and low sulfur content, along with the highest quality base oils. With a cold viscosity of SAE 5W, this oil ensures dependable cold starts in extreme temperatures, allowing for the quickest possible engine care. It's ideal for commercial vehicles, excelling in Euro 4, Euro 5, and Euro 6 engines, whether equipped with particulate filters and catalytic converters or not. Additionally, it works effectively with low-sulfur diesel fuels, making it a versatile choice for maintaining high performance in various conditions.

CAN BE USED WITH

ACEA E6 / E7 / EG	JASO DH-2
API CJ-4/CI-4 SN	MAN M 3677
MB 228.31/228.51	MAN M 3477
RENAULT VI RLD-3/RLD-2	MAN M 3271-1
RENAULT VI RXD / RGD	
CUMMINS CES 20081	
VOLVO VDS-4 / VDS-3	
MACK EO-O PREMIUM PLUS	
MTU TYPE 3.1	
MACK EO-M PLUS	
CAT ECF-3	
IVECO, SCANIA, DAF	

APPLICATION:

BRINOL 5w30 Greencargo is all seasons oil for Euro 4, Euro 5 and Euro 6 standards.

TECHNICAL CHARACTERISTICS

- excellent viscosity characteristics and shear stability,
- low ash, sulphur and phosphorus "low saps",
- fuel savings under all operating conditions,
- very good detergent and dispersant characteristics,
- extensive protection against wear, corrosion and foaming,
- excellent cold start properties
- suitable for catalysts, extended oil change intervals to protect natural resources.

TECHNICAL DETAILS

CHARACTERISTICS	UNIT DATA
colour	brown
density at 15°C	855 kg/l
viscosity at 40°C	70,20 mm²/s
viscosity at 100°C	11,80 mm²/s
flash point (coc)	212 °C
pour point	-44 °C

Brinol®

ITEM NO. 1255.09

5W30

BRINOL ENERGI
FULLY SYNTHETIC SAE 5W30



BRINOL ENERGI FULLY SYNTHETIC C2 5w30 is most modern, high performance, low friction engine oil for latest generation vehicles with special base oil which ensure high viscosity index and well balanced, advanced additives ensure best lubrication properties. Has excellent cold start behavior, protecting engine from corrosion, wear and friction. With carefully selected highly effective additives guarantee good stability at extreme loads and high temperatures.

APPLICATION:

BRINOL ENERGI FULLY SYNTHETIC is suitable for the energy saving operation all the year of all modern cars and vans with petrol and diesel engines.

CAN BE USED WITH

ACEA A3/B4
API SN/CF
MB 229.3
VW 502.00/505.00
BMW LONGLIFE-01
RENAULT RN0710
GM LL-A-025
GM LL-B-025

ITEM NO. 1256.09

5W30

BRINOL ULTRA ENERGI
LONGLIFE C2 SAE 5W30



brinol 5W30 C2 is a German quality formulated to meet high performance, low SAPS (Sulphated Ash, Phosphorus and Sulfur) fully synthetic & long life modern engine oil for petrol and diesel applications.

APPLICATION:

Brinol 5W30 C2 is a versatile, long-lasting, fuel-efficient, fully synthetic motor oil designed for both petrol and diesel engines, whether they are equipped with turbochargers or not. This lubricant is particularly well-suited for passenger car diesel engines that meet the specifications of various OEMs, making it widely applicable. The product meets the standards for pump-injector units.

CAN BE USED WITH

API SN/CF
ACEA C2
PSA B71 2290



Brinol[®]

ITEM NO. 1257.10

5W30

BRINOL TOP GRADE C4
RENAULT SAE 5W30



brinol Motor Oil 5W / 30 C4 longlife German quality oil is fully synthetic and for universal use. Developed using the latest technology and based on specially selected base oil with a high natural viscosity.

APPLICATION:

brinol Motor Oil 5W / 30 C4 longlife reduces fuel consumption and even protects against wear and corrosion.

CAN BE USED WITH

ACEA C4

MB 229.51/ 226.51

RN 0720

TECHNICAL CHARACTERISTICS

- excellent cold starting performance even at low temperatures of below 45°C.
- LOW SAPS technology. excellent viscosity characteristics and shear stability.
- fuel savings under all operating conditions.
- very good detergent and dispersant characteristics.
- high and stable viscosity index.
- neutral against sealing materials.
- low evaporation tendency, thereby lower oil consumption. perfect protection against wear, corrosion and foaming.
- suitable for catalysts and dpf's.
- extended oil change intervals to protect natural resources.



Brinol®

ITEM NO. 1265.15

5W40

BRINOL ULTRA PLUS
FULLY SYNTHETIC SAE 5W40



BRINOL ULTRA PLUS FULLY SYNTHETIC SAE 5W40 is a modern, fully synthetic, universal motor oil based on special selected synthetic base oils with a high viscosity index and a well-balanced choice of advanced additives

APPLICATION:

BRINOL ULTRA PLUS FULLY SYNTHETIC SAE 5W40 is a universal, long-life, special composed fully synthetic motor oil recommended for use in petrol and diesel engines, with or without turbo-diesel, in passenger cars and delivery vans for which the most modern specifications are required.

CAN BE USED WITH

ACEA A3/B4
API SN/CF
MB 229.3/226.5
VW 500.00/502.00/505.00/505.01
PORSCHE A40
BMW LONGLIFE-01
RENAULT RNO700/RN0710
GM LL-B-025
FIAT 9.55535-M2

ITEM NO. 1266.15

5W40

CLEAN MAX
C3 SAE 5W40



APPLICATION:

BRINOL ULTRA GRADE VW LONGLIFE C3 is a universal, long-life, fuel saving, fully synthetic motor oil suitable for use in petrol and diesel engines, with or without turbo-chargers. Moreover this lubricant is also very suitable for passenger cars diesel engines with the pump-injector-unit. This product meets requirements of several OEM's and thus has wide application.

CAN BE USED WITH

API CI-4. ACEA	MB 229.31/229.51
E6/E7	VW 504.00/507.00
MB 228.51	BMW LONGLIFE-04
MAN M 3477	PORSCHE C30
RENAULT VI RLD-2	
VOLVO VDS-3	
MACK EO-N	
DEUTZ	
DQC-III-10-LA	
MTU TYPE 3.1	
DAF LONG DRAIN	
API SN/CF	

Brinol[®]

ITEM NO. 1257.10

10W40

BRINOL ULTRA
SEMI SYNTHETIC SAE 10W40



BRINOL ULTRA SEMI SYNTHETIC SAE 10W40 is most modern, high performance, synthetic based, low friction engine oil based on high quality synthetic lubricant components with latest techniques suitable for all petrol and diesel passenger cars with and without turbo charger.

APPLICATION:

BRINOL ULTRA SEMI SYNTHETIC SAE 10W40 is suitable for the energy saving operation all the year of all modern cars with petrol and diesel engines. Suitable for cars of Japanese and Asian manufacturers.

CAN BE USED WITH

ACEA A3/B4.
API SM/CF;
MB 229.1
VW 502.00, VW 505.00
BMW LL 01
RN 0700/ RN 0710
PORSCHE A40



Brinol[®]

ITEM NO. 1268.17

20W50

OILS SAFARI
CARGO SAE 20W50



Oils Safari Cargo SAE 20w50 is motor oil with extended oil change intervals for mixed vehicle fleets for all years around. It is suitable for passenger cars and hardly used commercial vehicles with gasoline and diesel engines.

APPLICATION:

Oils Safari Cargo SAE 20w50 is the preferred use for extended oil life in turbo charged diesel engines according to manufacturer's recommendations.

TECHNICAL CHARACTERISTICS

- Very stable and excellent viscosity behaviour.
- Good shear stability.
- Very good cold start characteristics.
- Safe lubricating layer at very high operating temperatures.
- Suitable for extended oil change intervals
- Very good protection against corrosion and foam formation.

CAN BE USED WITH

ACEA A3/B4
API SN/CF
MB 229.3/226.5
VW 500.00/502.00/505.00/505.01
PORSCHE A40
BMW LONGLIFE-01
RENAULT RNO700/RN0710
GM LL-B-025
FIAT 9.55535-M2

TECHNICAL DETAILS

CHARACTERISTICS	UNIT DATA
colour	brown
density at 20°C	0.88 kg/l
viscosity at 100°C	19mm ² /s
flash point (COC)	226°C
pour point	-25 °C

Brinol[®]

RACING CARS



Brinol®

ITEM NO. 1269.19

5W50

BRINOL SUPREME RACING
FULLY SYNTHETIC SAE 5W50



BRINOL Supreme Racing SAE 5W-50 is a Universal synthetic motor oil, recommended for use in petrol- and diesel engines, with or without turbocharging, in passenger cars and delivery vans.

APPLICATION:

Supreme Racing SAE 5W-50 is a motor oil produced with synthetic base oils and a well-balanced choice of advanced additives to obtain the following properties:

- high and very stable viscosity index
- high resistance against shearing
- fast cold start
- safe lubrication film at very high temperatures
- very good detergency and dispersion
- very strong protection against wear, corrosion and foaming

CAN BE USED WITH

ACEA A3/B4
API SN/CF
MB 229.3/226.5
VW 500.00/502.00/505.00/505.01
PORSCHE A40
BMW LONGLIFE-01
RENAULT RNO700/RN0710
GM LL-B-025
FIAT 9.55535-M2

SPECIFICATION RECOMMENDATION:

ACEA A3/B4
API SN/CF



Brinol[®]

ITEM NO. 1270.20

10W60

BRINOL SUPREME RACING
FULLY SYNTHETIC SEA 10W60



Brinol Supreme Racing SAE 10W-60 is A fully synthetic engine oil, designed for cars for race conditions where the highest performance is required. This oil has proven its quality under the most extreme conditions.

APPLICATION:

A fully synthetic engine oil based on carefully selected high quality synthetic base oils, all of which already have a natural, high viscosity index and which advanced and well balanced additives in order to obtain the following properties:

- very low tendency to evaporation
- high and very stable viscosity index
- good resistance against shearing
- high resistance against aging
- safe lubrication film at low and very high temperatures
- very good detergency and dispersion power
- very strong protection against wear, corrosion, & foaming

CAN BE USED WITH

ACEA A3

B4

API SN

BMW-M

MB 229.1

FERRARI

FIAT

VW 501 00/505 00



Brinol®

ITEM NO. 1270.20

10W60

BRINOL SUPREME RACING
FULLY SYNTHETIC SEA 10W60



BRINOL Ultimate Racing SAE 5W-30 is a universal, fuel economy, specially composed motor oil, is recommended for use in petrol and diesel engines, with or without turbo-charging, in passenger cars and delivery vans with extended oil drain intervals. This motor oil also contributes to the extension of the lifetime of particle filters. Due to its special composition it is possible to apply this product for the VW 504.00/507.00 requirements,

CAN BE USED WITH

ACEA C3/API SN
VW 504.00/507.00
MB-APPROVAL 229.51
BMW LONGLIFE-04
PORSCHE C30

APPLICATION:

A fuel economy, universal motor oil, developed according the most recent technology, based on specially selected synthetic base oils and a well balanced choice of advanced additives to obtain the following properties:

- lower fuel consumption
- mid SAPS content
- suitable for modern catalysts
- fast cold start
- safe lubrication film at high temperatures
- extended oil drain intervals
- very good detergency and dispersion
- very strong protection against wear, corrosion, and foaming



Brinol[®]

MOTORCYCLE



Brinol®

ITEM NO. 1272.23

MC

10W40 BRINOL RACING
CROSS 4T SAE



BRINOL RACING CROSS 4T SAE 10W40 is a new generation, high-performance, fully synthetic engine oil for four-stroke motorbikes based on fully synthetic base oils and high quality additives. It has high and stable viscosity index to ensure best possible lubrication at any working conditions and improves protection of the engines, gearboxes and wet clutches.

CAN BE USED WITH

API SL

JASO MA2

JASO MA

APPLICATION:

BRINOL RACING CROSS 4T SAE 10W40 is specially developed for four-stroke motorbikes lubrication where specification SAE 10W40 is required. It is tried and tested with most popular and modern European and Japanese motorcycle manufacturers. Suitable for use in all air-cooled/liquid-cooled 4 stroke engines with wet and dry clutches.



Brinol®

4 STROKE

ITEM NO. 1273.24

10W40

SEMI-SYNTHETIC SAE 1040

1L
4L
5L
20L
60L
200L



1L
4L
5L
20L
60L
200L

BRINOL 4 stroke SAE 10W-40 is a High performance special oil for any motorcycles with air- or water-cooled 4-stroke engines of highest output. SAE 10W-40 is recommended for car petrol and diesel engines, also for turbo and catalytic converter versions.

APPLICATION:

BRINOL 4-Stroke SAE 10W-40 is a semi-synthetic, high-performance motor oil designed for low friction and falls under the viscosity class of SAE 10W-40. It combines the advantages of modern refining technology with synthetic components to maintain its specified viscosity throughout its lifespan. The oil's aging process is well-regulated, while antioxidants and cleaning additives prevent deposits, keeping pistons and valves clean and avoiding cold sludge formation. This results in lower friction losses, reducing environmental pollution and minimizing evaporation losses to prevent valve deposits, silting, and varnishing. ensuring clean pistons and piston ring grooves. This formulation leads to significant fuel savings.

CAN BE USED WITH

MB 229.3

VW 502 00 /505 00

SPECIFICATION RECOMMENDATION:

API SN

ACEA A3

JASO

4 STROKE

ITEM NO. 1274.24

10W50

BRINOL 4 STROKE
SAE 10W50



APPLICATION:

BRINOL 4 stroke SAE 10W-50 High performance special oil for any motorcycles with air- or water-cooled 4-stroke engines of highest output. High performance lubricant for ATV, SxS & SSV Recommended for ATV, SxS, SSV and buggy used for leisure and recreation. Suitable for all type of gasoline fuels, leaded or unleaded, with or without Ethanol, biofuels

SPECIFICATION RECOMMENDATION:

ACEA A3

API SN

JASO MA2

Brinol[®]

4 STROKE

ITEM NO. 1275.25

10W60

BRINOL 4 STROKE

FULLY SYNTHETIC SEA 10W60



BRINOL 4 Stroke SAE 10W/60 is a fully synthetic engine oil made from carefully selected, high-quality synthetic base oils. Ideal for race bikes with high-performance 4- stroke engines, it's suitable for bikes with or without an integrated gearbox and works with both wet and dry clutches. This oil is perfect for race engines that function across a wide range of temperatures and RPMs, making it suitable for applications such as speed bikes, MotoGP, SuperSport, Superbikes, and uphill or hill climb events. It contains advanced, well-balanced additives that provide a natural, high viscosity.

CAN BE USED WITH

ACEA A3

API SN

JASO MA2

- very low tendency to evaporation
- high and very stable viscosity index
- good resistance against shearing
- high resistance against aging
- safe lubrication film at low and very high temperatures
- very good detergency and dispersion power
- very strong protection against wear, corrosion and foaming



Brinol[®]

4 STROKE

ITEM NO. 1276.26

15W50

BRINOL 4 STROKE
FULLY SYNTHETIC SEA 20W50

1L
4L
5L
20L
60L
200L



BRINOL 4stroke SAE 15W/50 is Ultra 100% synthetic 4-Stroke engine oil. Top performance formula that meets and exceeds the highest industry standard JASO MA2 API SN specifications. Top technology 100 % synthetic base-stock with precisely balanced Ultra high-performance additive package. Allow maximum power delivery by reducing internal friction for exceptional wear protection, Increasing engine life for on-road, offroad, street or motorsports. Proven at extreme and temperature racing conditions, speed, endurance.

TECHNICAL CHARACTERISTICS:

- For all 4-stroke motorcycles and ATVs with or without catalytic converters.
- For engines with or without integrated gear box, transmission. Wet or dry clutch.
- JASO MA2 API SN ensures optimum clutch performance at start-up, acceleration, and full speed.
- Exceptional wear protection extending engine, gear box and clutch life, leading to reduced maintenance cost.
- For liquid cooled or air-cooled engines. Improves thermal stability and fuel efficiency.
- Improved high temperature deposit protection for engine cleanliness and minimum sludge build up.
- Reduces oil thickening facilitating extended oil life, inside the manufacturer's oil change interval recommendation.
- Smoother shifting and enhanced clutch feeling and precision.

CAN BE USED WITH

API SN PLUS
ACEA A3
JASO MA2



Brinol[®]

4 STROKE

ITEM NO. 1277.27

20W50

BRINOL 4 STROKE
FULLY SYNTHETIC 1L SEA 20W50



BRINOL 4stroke SAE 20W/50 synthetic, is full super high-performance, multi-grade lubricants for use in high-RPM, 4-stroke motorcycle engines with integral gear boxes and wet clutches as well as for use in any application requiring a four-stroke engine oil meeting the requirements of JASO MA2, JASO MA or API SN. BRINOL 4stroke SAE 20W/50 provides excellent protection during rapid RPM increase. Specialty friction modifiers provide for smooth clutch and gear shift operation while specialty anti-oxidants and sophisticated dispersant technology provide enhanced cleanliness.

TECHNICAL CHARACTERISTICS:

- For all 4-stroke motorcycles and ATVs with or without catalytic converters.
- For engines with or without integrated gear box, transmission. Wet or dry clutch.
- JASO MA2 API SN ensures optimum clutch performance at start-up, acceleration, and full speed.
- Exceptional wear protection extending engine, gear box and clutch life, leading to reduced maintenance cost.
- For liquid cooled or air-cooled engines. Improves thermal stability and fuel efficiency.
- Improved high temperature deposit protection for engine cleanliness and minimum sludge build up.
- Reduces oil thickening facilitating extended oil life, inside the manufacturer's oil change interval recommendation.
- Smoother shifting and enhanced clutch feeling and precision.

CAN BE USED WITH

API SN PLUS

ACEA A3

JASO MA2

Brinol[®]

4 STROKE

ITEM NO. 1277.27

20W50

BRINOL 4 STROKE
FULLY SYNTHETIC 1L SEA 20W50



BRINOL 4stroke SAE 20W/50 synthetic, is full super high-performance, multi-grade lubricants for use in high-RPM, 4-stroke motorcycle engines with integral gear boxes and wet clutches as well as for use in any application requiring a four-stroke engine oil meeting the requirements of JASO MA2, JASO MA or API SN. BRINOL 4stroke SAE 20W/50 provides excellent protection during rapid RPM increase. Specialty friction modifiers provide for smooth clutch and gear shift operation while specialty anti-oxidants and sophisticated dispersant technology provide enhanced cleanliness.

TECHNICAL CHARACTERISTICS:

- For all 4-stroke motorcycles and ATVs with or without catalytic converters.
- For engines with or without integrated gear box, transmission. Wet or dry clutch.
- JASO MA2 API SN ensures optimum clutch performance at start-up, acceleration, and full speed.
- Exceptional wear protection extending engine, gear box and clutch life, leading to reduced maintenance cost.
- For liquid cooled or air-cooled engines. Improves thermal stability and fuel efficiency.
- Improved high temperature deposit protection for engine cleanliness and minimum sludge build up.
- Reduces oil thickening facilitating extended oil life, inside the manufacturer's oil change interval recommendation.
- Smoother shifting and enhanced clutch feeling and precision.

CAN BE USED WITH

API SN PLUS

ACEA A3

JASO MA2

Brinol®

2 TAKT

ITEM NO. 1278.28

2 TAKT

BRINOL TAKT ULTRA 2TAKT
MOTORCYCLE OIL

1L
4L
5L
20L
60L
200L



BRINOL Ultra 2Takt motorcycle oil is a Fully synthetic high-performance 2-stroke oil for water- or air-cooled racing and road-engines with separate or petrol lubrication. Developed especially for high speed engines.

CAN BE USED WITH

API TC

ISO-L-EGD

JASO FD

TISI

2 STROKE

ITEM NO. 1280.28

2 TAKT

BRINOL 2-TAKT OUTBOARD OIL

BRINOL 2-Takt Outboard oil is a semi-synthetic speedboat engine oil self-mixing semi-synthetic 2-stroke oil for fresh water cooled outboard engines.

SPECIFICATION RECOMMENDATION:

API NMMA TC-W3

SAE J 1536 CLASS 3 (MERCURY MARINE,
BOMBARDIER, YAMAHA, SUZUKI, NISSAN)

2 STROKE

ITEM NO. 1279.28

2 TAKT

BRINOL PRIME 2TAKT
MOTORCYCLE OIL

1L
4L
5L
20L
60L
200L



BRINOL prime 2Takt motorcycle oil is a Semi-synthetic 2-stroke engine oil for universal use in petrol and separate lubricated units, especially in high-performance engines of motor vehicles, mopeds, chain saw drives, snowmobiles etc.

CAN BE USED WITH

API TC

ISO-L-EGD

JASO FD

TISI

1L
4L
5L
20L
60L
200L



Brinol[®]

HEAVY DUTY & TRUCKS



Brinol[®]

ITEM NO. 1281.30

5W30

ULTRA PLUS TRUCKS

100% SYNTHETIC 5W30 LOW ASH



APPLICATION:

Brinol low ash 5w30 is a top quality synthetic fuel economy "Low SAPS" year-round multigrade diesel engine oil based on the latest additive technology combined with very special base oils. This fuel saving lubricant has mainly been developed for heavy diesel engines even under the toughest operation conditions and all the year round. This product is very suitable for EURO 4, EURO 5 and EURO 6 engines in combination with diesel fuel with a low sulphur content.

TECHNICAL CHARACTERISTICS

- High wear protection
- Outstanding oxidation stability
- Excellent high temperature stability
- Outstanding detergent and dispersant properties
- Efficiency through low fuel consumption
- Long service life due to high oxidation stability
- Outstanding cold start behaviour, rapid engine oiling even at low temperatures
- Very good viscosity-temperature behavior
- Neutrality towards seals
- Low oil consumption due to the low evaporation loss through PAO and HC base oils

CAN BE USED WITH

MB 228.31/228.51
CAT ECF-3
CUMMINS CES 20081
DAF
DETROIT DIESEL DDC 93K218
DEUTZ DQC IV-10
LA/ IVECO/ MACK EO-O PP
EO-N PP/EO-M PLUS
MAN M3677
M3477
M3271-1
MTU TYPE 3.1
RENAULT

Brinol®

ITEM NO. 1282.31

10W30

BRINOL STOU

100% SYNTHETIC SAE 10W/30



APPLICATION:

Brinol STOU SAE 10W/30 is used and recommended in agricultural machines because of its multi-functional properties in engines, gears and hydraulics as well as in enclosed brake systems ("wet brakes"). Furthermore, this universal oil is outstandingly applicable to provide all machines and aggregates in the agricultural domain.

TECHNICAL CHARACTERISTICS

- provides trouble-free operation for engines, gears, axes, differentials, hydraulic- and brake-systems.
- Reduces the forming of aging-products at high temperatures.
- Absorbs acid gases from the fuel combustion.
- Assures optimally balanced frictional behavior in wet brakes and clutches.
- Has a low foaming tendency.

CAN BE USED WITH

API CF/CG-4/SF
API GL-4
ACEA E3-96
ALLISON C4-4
CASE NH MAT3525/3526
FORD M2C 159B+C
MASSEY FUERGUSON M 1139 / 1144
JOHN DEERE JDM 27
ZF TE-MIL-06A / -06B / -06C
MB 227.1 / MB 228.1
CATERPILLAR TO-2
HVLP-D 68
DIN 51524

Brinol®

ITEM NO. 1283.32

10W40

BRINOL OILS ULTRA CARGO

SAE 10W40



APPLICATION:

UltraCargo SAE 10w40 is top quality, fully synthetic, "Low SAPS" heavy duty diesel engine oil based on the latest additive technology combined with very special base oil. It is mainly developed for heavy diesel engines even under toughest operation conditions and all year around.

TECHNICAL CHARACTERISTICS

- Excellent viscosity characteristics and stability.
- Fuel savings under all operating conditions, shear
- Very good detergent and dispersant characteristics.
- Extensive protection against wear, corrosion and foaming.
- Excellent cold start properties.
- Suitable for diesel with DPF, EGR and SCR.
- Extended oil change intervals to protect natural resources.

TECHNICAL DETAILS

CHARACTERISTICS	UNIT DATA
colour	brown
TBN	10 mg koh/g
viscosity at 40°C	94mm ² /s
viscosity at 100°C	14,00 mm ² /s
flash point (coc)	211°C
pour point	-37 °C
viscosity index	154

CAN BE USED WITH

ACEA E6, E7, E9
API CJ-4
MB 228.31, 228.51
JASO DH-2
MAN 3477. 3575
VOLVO VDS-4
RENAULT RGD, RLD-3
CATERPILLAR ECF-3
CUMMINS 20081
DEUTZ DQC IV-10 LA
MACK EO-O PREMIUM PLUS

Brinol®

ITEM NO. 1273.24

10W40

BRINOL SUPER CARGO
SAE 10W40



BRINOL SUPER CARGO SAE 10W40 is high-quality, low-viscosity engine oil for commercial vehicles of the latest generation and in compliance with the most recent emission standards Euro 4, Euro 5 and Euro 6 based on high performance 100% synthetic technology. It is a highly alloyed low SAPS UHPD low-friction engine oil for commercial vehicles engines equipped with Diesel Particle Filter (DPF) also, this product is suitable for vehicles equipped with EGR and/ or SCR after treatment systems.

APPLICATION:

BRINOL SUPER CARGO SAE 10W40 is commercial vehicle engines, which are based on the emission standards Euro IV, Euro V, Euro VI. BRINOL Super Cargo SAE 10W40 is also suitable for natural gas (CNG) engines.

CAN BE USED WITH

API CI-4, ACEA E6/E7

MB 228.51,

MAN M 3477.

RENAULT VI RLD-2.

VOLVO VDS-3.

MACK EO-N.

DEUTZ DQC-III-10-LA,

MTU TYPE 3.1

DAF LONG DRAIN

ITEM NO. 1274.24

10W50

BRINOL HEAVY CARGO
SAE 10W40



BRINOL RACING CROSS 4T SAE 10W40 10W-40 is a new generation, high-performance, fully synthetic engine oil for four-stroke motorbikes based on fully synthetic base oils and high quality additives. It has high and stable viscosity index to ensure best possible lubrication at any working conditions and improves protection of the engines, gearboxes and wet clutches.

APPLICATION:

BRINOL RACING CROSS 4T SAE 10W40 is specially developed for four-stroke motorbikes lubrication where specification SAE 10W40 is required. It is tried and tested with most popular and modern European and Japanese motorcycle manufacturers. Suitable for use in all air-cooled/liquid-cooled 4 stroke engines with wet and dry clutches.

CAN BE USED WITH

API SL

JASO MA2

JASO MA

Brinol®

ITEM NO. 1286.34

15W40

BRINOL HEAVY DUTY
ENGINE OIL MINERAL SAE 15W40



BRINOL Heavy Duty Engine Oil Mineral SAE 15W-40 is a motor oil designed for extended oil change intervals. It is suitable for passenger cars and infrequently used commercial vehicles equipped with gasoline and diesel engines. This oil is ideal for mixed vehicle fleets of all ages.

APPLICATION:

BRINOL Heavy Duty Engine Oil Mineral SAE 15W-40 is the recommended choice for maximizing oil life in turbocharged diesel engines, following the manufacturer's guidelines.

TECHNICAL CHARACTERISTICS

- Excellent viscosity characteristics and shear stability.
- Fuel savings under all operating conditions.
- Excellent viscosity and temperature behavior.
- Extensive protection against wear, corrosion and foaming.
- Extended oil change intervals.

CAN BE USED WITH

ACEA E7
API CI-4, API SL
MB 228.3
MAN 3275
VOLVO VDS 3
DEUTZ DQC III
CUMMINS 20077, 20078
CATERPILLAR ECF 1A
RENAULT RLD-2
DDC 93K215
JASO DH-1
GLOBAL DHD-1



Brinol®

ITEM NO. 1287.35

15W40

BRINOL HEAVY DUTY

SUPER TRUCKS 15W-40 SUPER SHPD



Super Trucks 15w40 is an all-year engine oil for diesel engines with or without turbo charging, for trucks, busses and work machines.

APPLICATION:

Super Truck 15w40 is a diesel engine oil with high wear protection, which is also suitable for vehicles with exhaust gas recirculation systems.

TECHNICAL CHARACTERISTICS

- High pressure absorption capacity
- High oxidation stability
- Outstanding temperature stability
- Very good detergent and dispersing properties
- Excellent aging resistance
- High wear protection
- Excellent viscosity-temperature behavior
- Neutrality to seals
- High safety reserves even with boundary lubrication conditions
- Best suitability for difficult operating conditions

CAN BE USED WITH

CAT ECF-3
ECF-2
ECF-1
CUMMINS CES 2081
DEUTZ DQC III -10LA
FORD WSS-M2C171-F1/ FORD
WSS-M2C171-E
MACK EO-O PREMIUM PLUS
MAN M 3575/ M 3275
MB 228.51/ MB 228.31
MTU TPYE2.1
RENAULT VI RLD-3
VOLVO VDS-4

Brinol[®]

HYDRAULICS OIL



ITEM NO. 1288.37

ISO 32

BRINOL SUPER CARGO

HIGH QUALITY MULTI-GRADE
HYDRAULIC OIL



BRINOL Hydro ISO 32 is high quality multigrade hydraulic oil type HVLP based on special selected high quality base oil. BRINOL Hydro ISO 32 offers excellent due to the extreme resilience, viscosity-temperature behavior and good wear protection predestined strong for use in all claimed mobile and industrial hydraulic systems. Prevent good air and water foaming and get in touch with oxidation inhibitors high resistance to aging. The behavior against sealing materials is neutral.

APPLICATION:

BRINOL Hydro ISO 32 is suitable for heavy loaded hydraulic machines of the industry, for earth moving machines and agricultural machines.

CAN BE USED WITH

ISO 6743/4 HV
DIN 51502 HV
DIN 51524/3 HVLP
U.S. STEEL 126, 127
SPERRY VICKERS I-286-S
AFNOR NF E 48-603(HV),
CETOP RP 91H (HV)
HOESCH HWN 2333.
THYSSEN TH N-256 132
DENISON FILTERABILITY TP 02100,
SEB 181222

4 STROKE

ITEM NO. 1289.37

ISO 46

BRINOL HYDRO ISO 46

HIGH QUALITY MULTI-GRADE
HYDRAULIC OIL



BRINOL Hydro ISO 46 is high quality multigrade hydraulic oil type HVLP based on special selected high quality base oil. BRINOL Hydro ISO 46 offers excellent due to the extreme resilience, viscosity-temperature behavior and good wear protection predestined strong for use in all claimed mobile and industrial hydraulic systems. Prevent good air and water foaming and get in touch with oxidation inhibitors high resistance to aging. The behavior against sealing materials is neutral.

APPLICATION:

BRINOL Hydro ISO 46 is suitable for heavy loaded hydraulic machines of the industry, for earth moving machines and agricultural machines.

CAN BE USED WITH

ISO 6743/4 HV
DIN 51502 HV
DIN 51524/3 HVLP
U.S. STEEL 126, 127
SPERRY VICKERS I-286-S
AFNOR NF E 48-603(HV),
CETOP RP 91H (HV)
HOESCH HWN 2333.
THYSSEN TH N-256 132

Brinol®

ITEM NO. 1290.38

ISO 68

BRINOL HYDRO ISO 68

HIGH QUALITY MULTI-GRADE HYDRAULIC OIL



BRINOL Hydro ISO 68 is High quality hydraulic oil developed to meet the demands of even the most demanding hydraulic systems. Recommended for a large number of hydraulic systems, especially where these operate under fluctuating temperatures, such as hydraulic systems in construction machinery, forklifts, truck cranes, etc.

APPLICATION:

BRINOL Hydro ISO 68 is suitable for heavy loaded hydraulic machines of the industry, for earth moving machines and agricultural machines.

CAN BE USED WITH

ISO 6743/4 HM

DIN 51 502 H

DIN 51 524-2 HLP



Brinol[®]

ITEM NO. 1291.39

ISO 100

BRINOL HYDRO ISO 100
HIGHT-PERFORMANCE GEAR OIL



BRINOL Hydro ISO 100 is mineral highperformance gear oil developed for lubrication of heavy-duty industrial gears working under extreme pressure and severe operating conditions. Formula with an effective non-zinc additive increases oxidation stability helps to improve high pressure properties and protective capabilities.

APPLICATION:

BRINOL Hydro ISO 100 is developed for lubrication of all types of industrials gears particularly stressed gearboxes with high gears pressures, it is suitable for roller transmissions as well as screw gears, lubricate bearings and others moving machine parts.

CAN BE USED WITH

ISO VG 100

ISO 6743/3 CKC

DIN 51 517 PART 3 CLP,

AGMA 9005.

US STEEL 224

Brinol[®]

GEAR OILS



Brinol®

ITEM NO. 1290.38

RED

ISO 68

BRINOL HYDRO ISO 68

HIGH QUALITY MULTI-GRADE HYDRAULIC OIL



TECHNICAL CHARACTERISTICS

BRINOL Power ATF IIIH Automatic transmission oil / Servo oil, developed for use in automatic transmissions where Dexron (II or III) is required. The product is specially developed for high thermal stability and resistance to oxidation, which protects against the formation of coatings and oil thickenings, thereby extending the life of components and lubricant. By using brinol Dexron III, the friction properties are improved, and at the same time provides a smooth shift as well as an efficient power transmission.

- Excellent thermal- and oxidation stability.
- Special friction modifiers.
- Very high viscosity Index.
- Low pourpoint.
- Excellent shifting at very low and high temperatures.
- Excellent protection against the forming corrosion, foam and wear

APPLICATION:

BRINOL Hydro ISO 68 is suitable for heavy loaded hydraulic machines of the industry, for earth moving machines and agricultural machines.

CAN BE USED WITH:

DEXRON IIIH
ALLISON C-4
ALLISON TES-389
CATERPILLAR TO-2
FORD MERCON
VOITH H55.6336.41/G607
M2C 138-CJ; M2C 166-H
MB 236.1
MAN 339 TYPE V-1/Z-1
ZF TE-ML 04D/09/11A/14A



Brinol®

RED

ITEM NO. 1293.42

ATF 134

BRINOL ATF 134
FULLY SYNTHETIC

1L
4L
5L
20L
60L
200L



BRINOL ATF 134 is specifically formulated for automatic transmissions (NAG2/model 722.9) manufactured until June 18, 2010. This fluid is also suitable for earlier Mercedes-Benz 5-speed automatic transmissions with a controlled lockup clutch and rear-wheel drive, and it is backwards compatible with the previous specification MB release 236.12. Additionally, BRINOL is designed for newer Mercedes-Benz models with 7-speed automatic transmissions (NAG1/construction pattern 722.6).

TECHNICAL CHARACTERISTICS

- Highest quality features
- High load carrying capacity and extremely wear-reducing
- Superior coefficient of friction constancy
- No foaming
- Lowest evaporation losses
- Soft shifts even at low temperatures
- Excellent viscosity-temperature behavior
- Excellent oxidation and thermal stability
- Neutral compared to usual sealing materials
- Red coloured

SPECIFICATION RECOMMENDATION:

MB 236.14

BLUE

ITEM NO. 1294.28

ISO 46

BRINOL ATF134FE
FULLY SYNTHETIC

1L
4L
5L
20L
60L
200L



ATF 134 FE is specifically formulated for the latest Mercedes-Benz 7-speed automatic transmissions (NAG2FE +) produced from June 21, 2010. Please note that BRINOL ATF 134 FE should not be used in older Mercedes-Benz automatic transmissions, as it is not backward compatible.

APPLICATION:

BRINOL Hydro ISO 46 is suitable for heavy loaded hydraulic machines of the industry, for earth moving machines and agricultural machines.

SPECIFICATION RECOMMENDATION:

MB 236.15

CAN BE USED WITH

FORD MERCON® ULV
FORD XT-12-QULV
FORD WSS-M2X-949A
FORD 10R60, 10R80
GM 10L80, 10L90
ALLISON 10L100

Brinol®

RED

ITEM NO. 1295.43

ATF VI

BRINOL ATF VI
FULLY SYNTHETIC

1L
4L
5L
20L
60L
200L



APPLICATION:

BRINOL ATF VI is A very high graded automatic transmission fluid formulated with a number of special selected base oils and additives to obtain the following properties:

- Very high viscosity index
- High load carrying capacity and extremely wear-reducing
- Twice the life of a normal ATF
- No foam formation
- High thermal stability
- Soft switching operations even at low temperatures
- Excellent viscosity-temperature behaviour
- Excellent oxidation stability
- Neutral towards common sealing materials
- Excellent oxidation stability
- Red coloured

CAN BE USED WITH

DEXRON® VI,VOLLSTÄNDIG MIT,G

II DAISIN WARNER

JWS 3324,ATF TYPE 3.0

TYPE 3.1,BENTLEY P/N PY112995PA

BMW/MINI ATF 3+

BMW/MINI P/N 83 22 0 142 516

BMW/MINI P/N 83 22 0 397 114

BMW/MINI P/N 83 22 2 163 514

(BMW 8072 B)

ITEM NO. 1296.43

YELLOWISH-BROWN

ATF 6G

BRINOL ATF6G
FULLY SYNTHETIC

1L
4L
5L
20L
60L
200L



APPLICATION:

ATF 6G is Especially for modern ZF 6-speed automatic transmissions in powerful vehicles. BRINOL ATF 6G can also be used in older BEAReed machines (ZF 5HP). Not for use in Pobecutch) or CVT(Stepless ons.

TECHNICAL CHARACTERISTICS

- High shifting comfort
- Highest quality features
- High load carrying capacity and extremely wear-reducing
- Superior coefficient of friction constancy
- No foaming
- Lowest evaporation losses
- Excellent low-temperature switching behavior
- Adapted friction coefficient behavior, also for sporty switching operations
- Excellent oxidation and thermal stability
- Neutral compared to usual sealing materials

CAN BE USED WITH

BMW ATF M 1375.4 (83 22 0 142 516)

BENTLEY OIL PY 112995PA

FORD MERCON SP/LV

HYUNDAI SP-IV

JAGUAR FLUID 8432

LAND ROVER TYK 500050

Brinol®

RED

ITEM NO. 1297.44

ATF 8G

BRINOL ATF 8G
FULLY SYNTHETIC

1L
4L
5L
20L
60L
200L



APPLICATION:

High graded ATF gear fluid. This premium synthetic product is specially formulated for the lubrication of ZF 8 and 9 automatic transmissions. It contributes greatly to fuel saving and can be used amongst others in the ZF 8HP transmissions 8HP45, 8HP55, 8HP70 and 8HPgo. A very high graded automatic transmission fluid based on special selected synthetic base oils, with a high viscosity index and a number of selected additives to obtain the following properties:

- excellent fuel economy characteristics
- excellent lubrication
- very good resistance against oxidation and a very high thermal stability
- excellent and very stable friction characteristics that enable longer oil-replacement intervals
- excellent resistance against foaming
- excellent protection against wear
- a very high and stable viscosity index
- green coloured

CAN BE USED WITH

BMW L 12108 (ATF3+).
BMW 83 22 O 142 516
VW AUDI G 060 162
CHRYSLER 68157995AA
FIAT 9.55550-AV5
HONDA ATF-TYPE 3.1
JAGUAR 02JDE 26444
FLUID 8432

ITEM NO. 1298.44

YELLOWISH-BROWN

ATF 9G

BRINOL ATF 9G
FULLY SYNTHETIC

1L
4L
5L
20L
60L
200L



APPLICATION:

ATF 9G is A Very high graded ATF gear fluid This certain product is specially formulated for Mercedes-Benz 9-speed automatic transmissions. Thanks to its very low viscosity, it contributes greatly to reducing consumption. BRINOL ATF 9G can be used in automatic transmissions where an oil with specification MB 236.17 is required. A very high graded, extremely low-viscosity automatic transmission fluid based on special selected synthetic base oils, with a high viscosity index and several selected additives to obtain the following properties:

- excellent contribution to fuel economy excellent lubrication
- very good resistance against oxidation
- very good thermal stability
- excellent and very stable friction characteristics
- excellent resistance against corrosion and foaming
- excellent protection against wear
- very high and stable viscosity index

SPECIFICATION RECOMMENDATION:

MB 236.15

CAN BE USED WITH

MB APPROVAL
MB 236.10
MB 236.12
MB 236.14
MB 236.15

Brinol®

ITEM NO. 1299.45

RED

ATF PREMIUM 1+

BRINOL ATFPREMIUM 1 PLUS
BESTMULTI-VEHICLEATF



BRINOL ATF Premium 1 Plus is our best multivehicle ATF. This full synthetic formulation offers true multivehicle performance, out-standing wear protection, and exceptional fluid life. It provides the frictional properties, wear protection and viscometrics needed by most major North American, Asian and European automatic transmissions. It is especially formulated to provide consistent shift feel and transmission protection over a long fluid life. ATF Premium 1 Plus benefits include excellent oxidation and shear stability, out-standing wear protection, and exceptional low temperature fluidity. It also provides industry leading anti-shudder durability (ASD) and frictional stability; exceeding the performance of many genuine OEM fluids. ATF Premium 1 Plus uses crystal clear synthetic base oils. Used in combination with leading edge additive technology this allows ATF Premium 1 Plus to retain its "fresh oil" properties longer, thereby delivering superior performance and superior savings. ATF Premium 1 Plus also provides savings through inventory consolidation by offering true multi-vehicle performance.

Compatible with all transmission seal materials:
• Helps to maintain seal integrity and prevent leaks

CAN BE USED WITH:

ALLISON C-4 / TES-295 /

TES-389

AISIN WARNER JWS 3309

BMW/MINI 81 22 9 400 272/

83 22 0 024 249

83 22 0 402 413, 83 22 0 403

CHRYSLER/DODGE/JEEP ATF

AS68RC ATF,

CHRYSLER/DODGE/JEEP SP-III

FORD MERCON®

FORD/LINCOLN

XT-5-QM /-DM [V], XT

8-QAW [PREMIUM

Brinol®

ITEM NO. 1300.46

GREEN

PSF 1+ PREMIUM

BRINOL PSF PREMIUM 1 PLUS

PREMIUM PERFORMANCE POWER STEERING
AND CENTRAL HYDRAULIC FLUID



Premium Performance Power Steering and Central Hydraulic Fluid is a synthetic hydraulic agent highly effective in a variety of hydraulic systems, such as power steering systems, leveling systems, shock absorbers, ABS/ASR and ASC systems, hydraulically controlled couplings, and electro-hydraulic folding roof control systems. It is also suitable for hydraulic absorption, pneumatic systems, spring hydrostatic systems, and various devices and driving mechanisms.

- Extremely positive viscosity development due to an exceptional
- high viscosity index > 300 (!)
- Very low pour point
- Very strong anti-foaming properties
- Good compatibility with seals
- Green coloured
- Good electrical conductivity protects against static discharges
- Improved EP and wear resistance

Compatible with all transmission seal materials:

- Helps to maintain seal integrity and prevent leaks

CAN BE USED WITH:

ALLISON C-4 / TES-295 /

TES-389

AISIN WARNER JWS 3309

BMW/MINI 81 22 9 400 272/

83 22 0 024 249

83 22 0 402 413, 83 22 0 403

CHRYSLER/DODGE/JEEP ATF

AS68RC ATF,

CHRYSLER/DODGE/JEEP SP-III

FORD MERCON®

FORD/LINCOLN

XT-5-QM /-DM [V], XT

8-QAW [PREMIUM]

Brinol®

BLUE

ITEM NO. 1301.47

MBX 15

BRINOL ATF MBX 15
AUTOMATIC GEARBOX OIL

1L
4L
5L
20L
60L
200L



APPLICATION:

BRINOL ATF MBX 15 is High quality oil in German quality from brinol. This oil is a high performance automatic transmission oil specially developed for Mercedes-Benz.

CAN BE USED WITH

MB 236.15

ITEM NO. 1302.47

YELLOWISH-BROWN

CHF

BRINOL CHF
HIGHQUALITYCHF SERVO & HYDRAULIC OIL

1L
4L
5L
20L
60L
200L



APPLICATION:

BRINOL CHF is high quality CHF servo & hydraulic oil, based on special premium base oils and additives, to achieve some completely unique properties. The product has a high viscosity index, does not affect seals and even prevents leaks.

CAN BE USED WITH

VW/AUDI GO02 000 / TL52 146

PORSCHE 000.043.203.33

BMW 81.22.9.407.758

MB 345.00

MAN 3623/93

OPEL B040.0070

ISO 7308

Brinol®

ITEM NO. 1300.46

RED

PSF 1+ PREMIUM

BRINOL ULTRA POWER ATF DSG / DCT FLUID
AUTOMATIC GEARBOX OIL



BRINOL ULTRA POWER ATF DSG / DCT FLUID is high performance, fully synthetic automatic gearbox oil specially design for Double Clutch Transmissions (DCT). BRINOL ULTRA POWER ATF DSG / DCT FLUID specially selected additives ensures smooth gear shifting performance, protection against wear, corrosion and foaming.

APPLICATION:

BRINOL ULTRA POWER ATF DSG / DCT FLUID meets the requirements of a wide range of European, Asian and American car manufacturers using Double Clutch Transmissions. Can be used for BMW designed by GETRAD, VW DSG designed ZF Double Clutch Transmissions.

CAN BE USED WITH:

- Extremely positive viscosity development due to an exceptional
- high viscosity index > 300 (!)
- Very low pour point
- Very strong anti-foaming properties
- Good compatibility with seals
- Green coloured
- Good electrical conductivity protects against static discharges
- Improved EP and wear resistance

BMW 83 22 2 148578

BM 83 22 2 148 579

BMW 83 22 O 440 214

BMW 83 22 2 147 477

VW TL 052 182

VW TL 052 529

AUDI VW TL 052 182

AUDI VW TL 052 529

MB 236.21

PORSCHE 999.917.080.00

Brinol®

ITEM NO. 1304.49

GELBBRAUN

75W80

BRINOL SYNCRO
GLX SAE 75W80

1L
4L
5L
20L
60L
200L



APPLICATION:

Gear oil 75W / 80 Synchronous 4 MX 75W-80 It is suitable for transaxles, manual gearboxes. It is especially recommended for cars BMW, VW and MercedesBenz.

CAN BE USED WITH

API GL-4/GL-5

MT-1

MIL-L-2105D

FORD

GM

BMW

VW

MB

PSA

RENAULT

NISSAN

GELB

ITEM NO. 1305.49

75W90

BRINOL SYNCRO
GL5 SAE 75W90

1L
4L
5L
20L
60L
200L



APPLICATION:

brinol Gear Oil 75W / 90 GL-5 Synthetic Low Friction EP Gear Oil This oil is designed for use in gearboxes, transaxles, non-synchronized manual transmission systems, transfer drives, and final drives.

CAN BE USED WITH

BMW ATF M 1375.4 (83 22 O 142 516)

BENTLEY OIL PY 112995PA

FORD MERCON SP/LV

HYUNDAI SP-IV

JAGUAR FLUID 8432

LAND ROVER TYK 500050

SPECIFICATION RECOMMENDATION:

API GL-4

GL-5

MT-1

MIL-L-2105 D/E

Brinol®

ITEM NO. 1306.50

GELBBRAUN

80W90

BRINOL GEAR OIL
80WGO GL4.



BRINOL Oils Gear SAE 80WGO is a mineral Brinol 80W-90 Brinol 80W-90 20L Brin multifunctional gear oil for manual transmissions. It is based on high-quality solvent refined base oils with a special additive treatment. It is tailored to the requirements of the hypoid manual transmissions to ensure proper operation of the transmission.

TECHNICAL CHARACTERISTICS

- Optimum viscosity temperature behavior, goop shear stability.
- Best wear protection and good transmission efficiency.
- Excellent dirt-carrying capacity that means cleanliness of the units even after extended oil change intervals.
- Good compatibility with elastomers to avoid leaks.
- High oxidative stability prevents oil thickening and deposits.
- Good protection against corrosion and good non-ferrous metal compatibility.
- Extreme pressure stability.
- Very good low temperature properties.

APPLICATION:

BRINOL Oils Gear SAE 80WGO This is a multi-range transmission oil designed for manual transmissions and axle drives. Suitable for use in vehicles and working machines. It is essential to adhere to the operating instructions specified by the vehicle and manufacturer for transmissions and intermediate transmissions.

SPECIFICATION RECOMMENDATION:

API GL-4
GL-5
MT-1
MIL-L-2105 D/E

CAN BE USED WITH:

API GL-5.
MIL-L-2105D,
MAN 342 TYPE M-1,

Brinol®

ITEM NO. 1307.51

GELB

75 W140

BRINOL SYNCRO PLUS GLX SAE 75W140

HIGH QUALITY GEAR OIL ON MINERAL BASE.



APPLICATION:


High quality gear oil on mineral base. Reduces noise and vibration in the shaft, and provides maximum wear protection based on the viscosity range. The gear oil has good flow properties, which increased the protection during cold starts.

CAN BE USED WITH:

SAE 75W-140
API GL-5 LS (LIMITED SLIP)
MIL-L 2105 D
MAN 342
SCANIA STO 1: O

Brinol[®]

BREAK FLUIDS

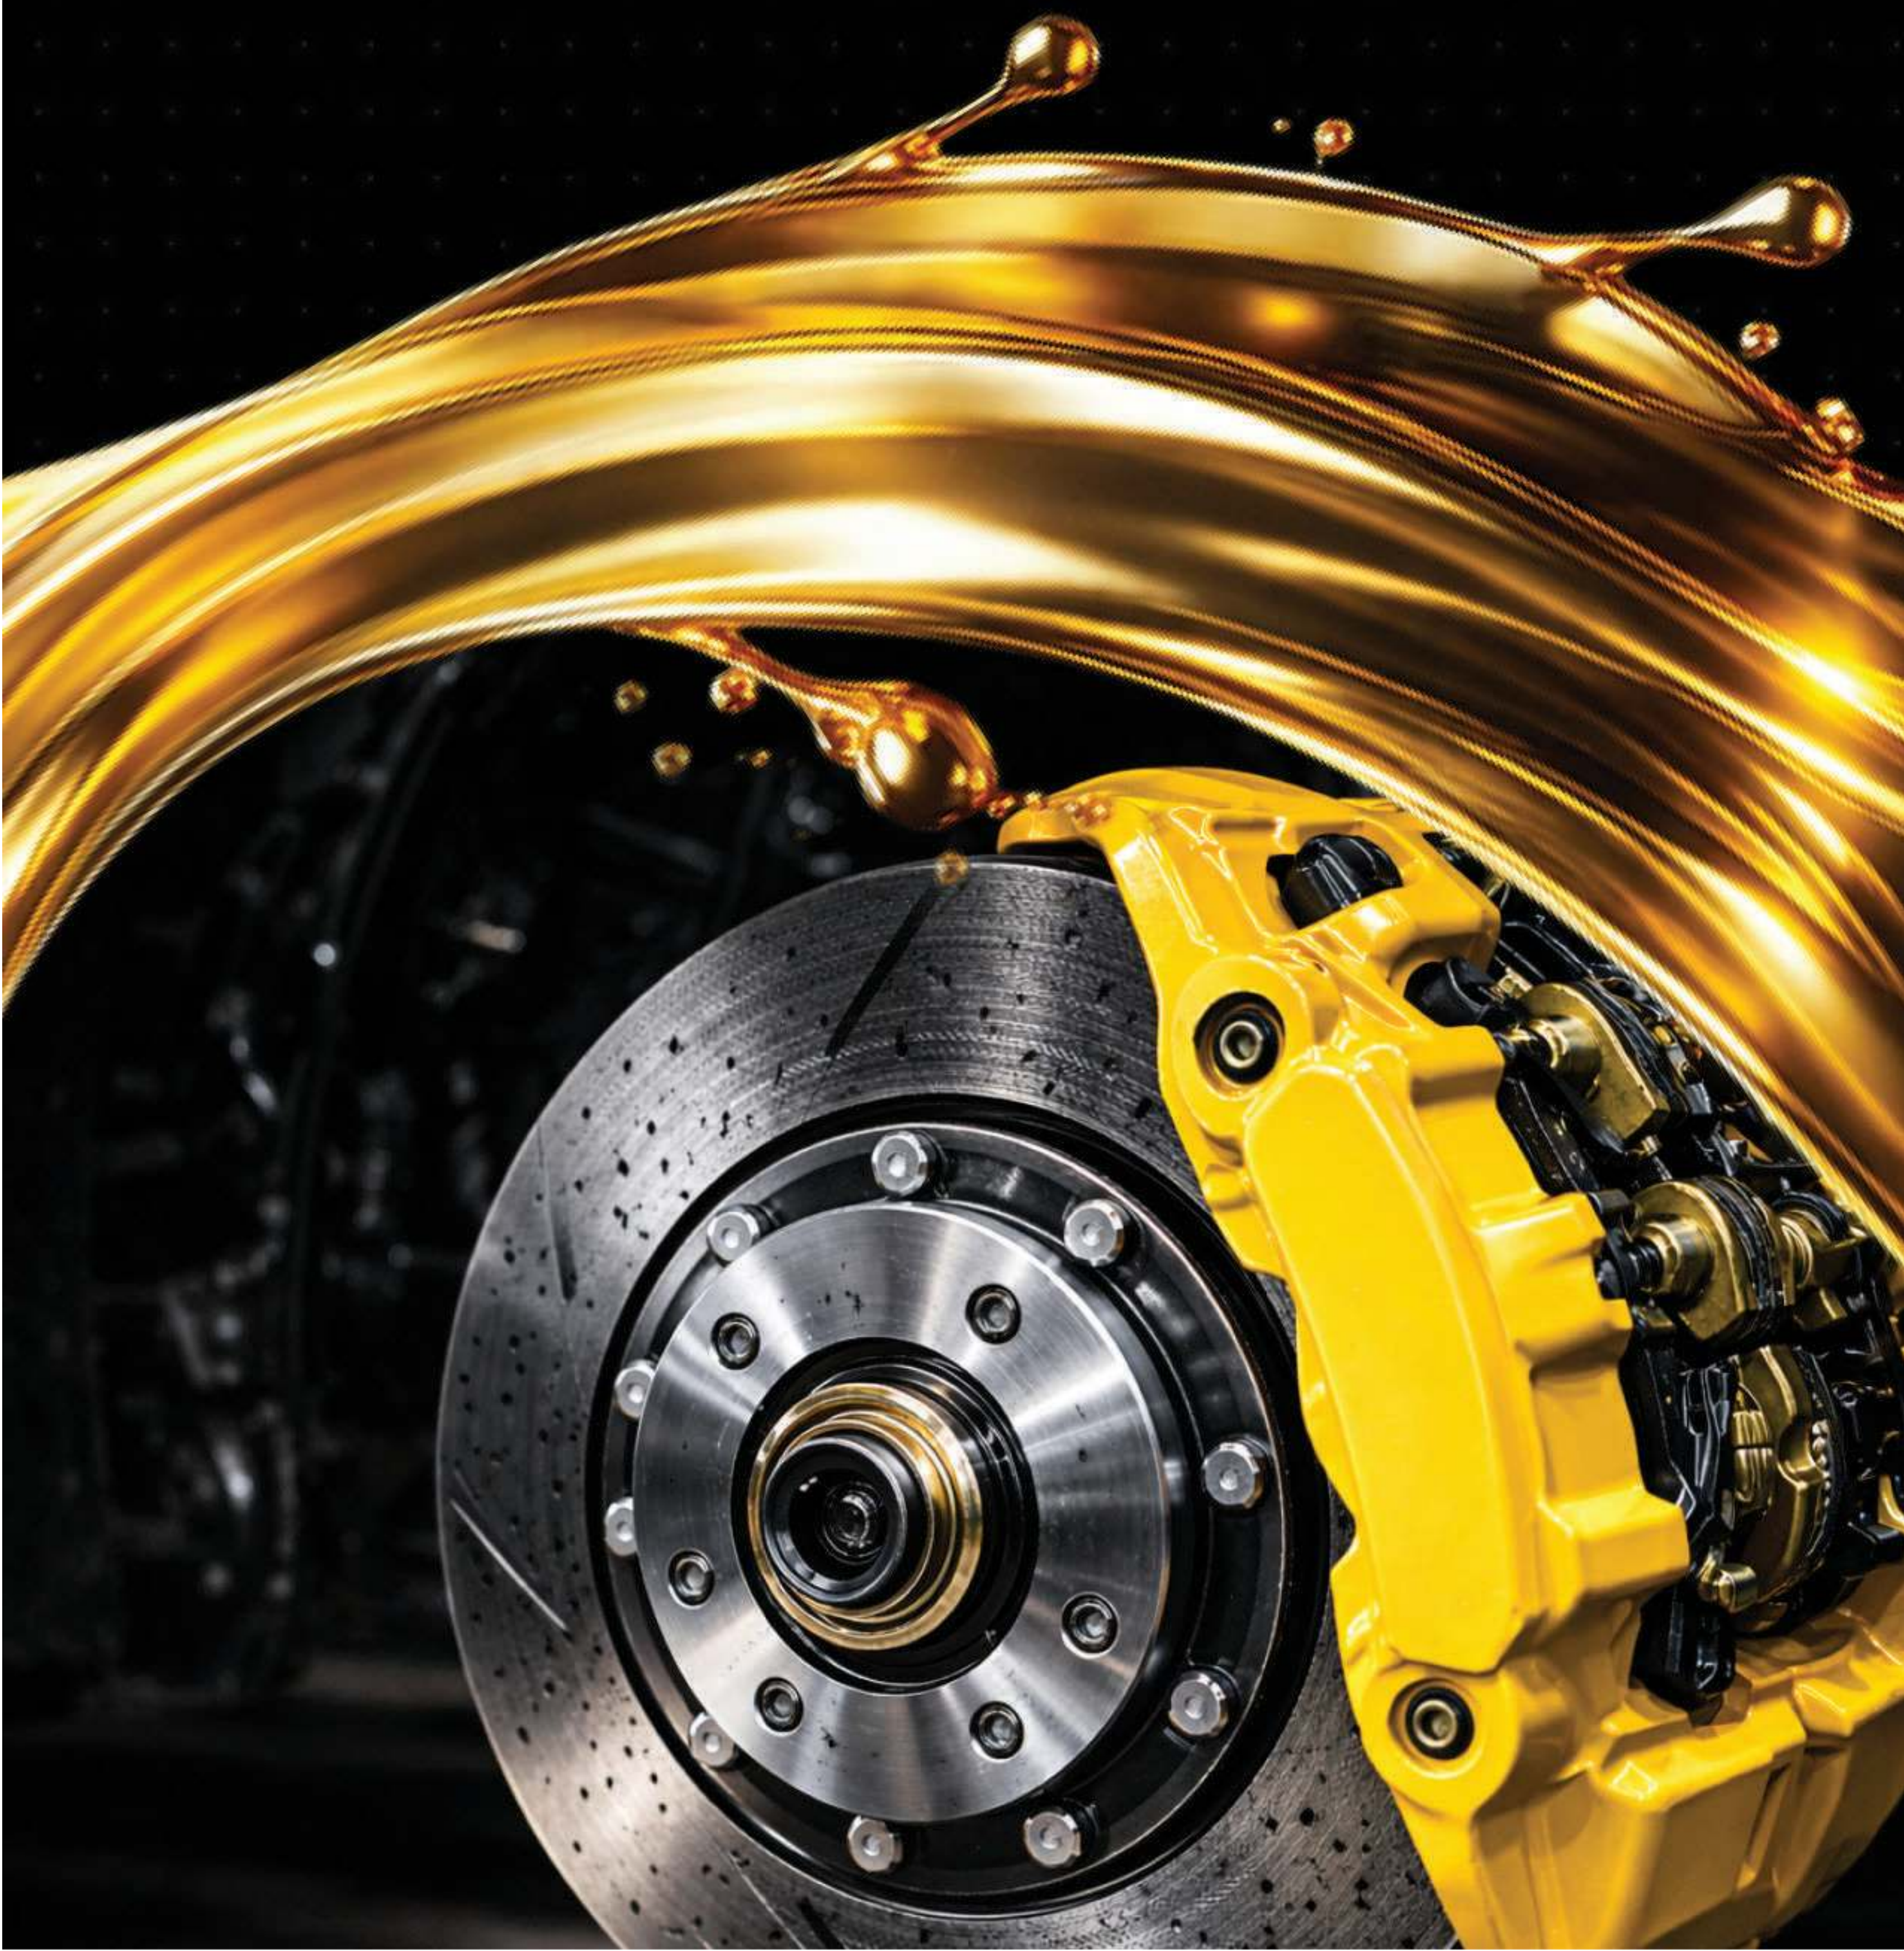

Brinol[®]

ITEM NO. 1308.52

GELB

DOT 4

BRINOL BRAKES

DOT 4 SYNTHETIC



APPLICATION:

BRINOL Brake DOT 4 is a high-performance synthetic brake fluid based on glycol, featuring heat-stable properties that guarantee long-lasting durability. With its elevated boiling point, this product is especially ideal for highly stressed braking systems, such as those used while towing a trailer or caravan.

- Excellent anti-corrosion properties
- High boiling point

CAN BE USED WITH:

FMVSS 116 DOT 4

SAE J1703. ISO 4925



Brinol[®]

MARINE LUBRICANTS





MAIN LUBRICANTS

ITEM	TYPE
MARINE C	SYSTEM OIL
MARINE C	TRUNK PISTON ENGINE OIL
MARINE C	TRUNK PISTON ENGINE OIL
MARINE C	TRUNK PISTON ENGINE OIL
MARINE C	TRUNK PISTON ENGINE OIL
MARINE C	CYLINDER OIL

AUXILLIARY LUBRICANTS

ITEM	TYPE
ROLON	GEAR OIL
FRIGUS HA	REFRIGERATING OIL
MVK-2	COMPRESSOR OIL
MTL	SYNTHETIC HEAT TRANSFER OIL
TPX	TURBINE OIL
TPS EP	TURBINE OIL
MHV	HYDRAULIC OIL
SHPD VDS-3	ENGINE OIL

GREASES

ITEM	TYPE
LITHIUM EP	MULTIPURPOSE ANTIFRICTION GREASE
LIMO	MULTIPURPOSE ANTIFRICTION GREASE
LIX EP 2	LUBRICATION GREASE
K-G	CALCIUM SOAP AND GRAPHITE-THICKENED LUBRICATION GREASE

Brinol[®]

COOLANTS



Brinol[®]

ITEM NO. 1309.57

GOLDEN ANTIFREEZE G11

COOLANT BLUE G11 READY-MIXED OR CONCENTRATE

Brinol Antifreeze: Year-Round Coolant Solution is a coolant and antifreeze designed for all-year use. It is formulated from ethylene glycol and contains silicate-free additives based on organic (mono and dicarboxylic) acids. This product offers protection against freezing, overheating, and corrosion in combustion engines and is suitable for passenger cars, trucks, buses, off-road vehicles, and stationary engines. Brinol Antifreeze is ready to use and does not require dilution with water.

4L

60L



APPLICATION:

Consisting primarily of ethylene glycol, which gives your engine protection against frost, corrosion and overheating. The coolant does not contain nitrite, amine or phosphate. It is recommended to check the color of the coolant in the expansion tank - fill with the same coolant / color BRINOL ANTIFREEZE guarantees freeze/frost protection at ambient temperatures down to minus 40 degrees Celsius". "Note - This temperature is the average value of the Initial Crystallization Temperature value and the Pour Point value. The exact value of the Freezing Temperature is determined in a laboratory. Approximate values can be obtained by refraction meters and hydrometers, calibrated for ethylene glycol based coolants.

Brinol®

ITEM NO. 1310.58

GOLDEN ANTIFREEZE G12

COOLANT RED G12 – READY-MIXED OR CONCENTRATE

BRINOL ANTIFREEZE LONG LIFE is a concentrated antifreeze formulated with ethylene glycol and a specially developed additive system that utilizes silicate-free organic acids (both mono- and di-carboxylic). This product is free from potentially harmful ingredients such as nitrites, amines, and phosphates, making it an environmentally friendly choice. BRINOL ANTIFREEZE LONG LIFE provides year-round protection against freezing, overheating, and corrosion for the engines of passenger cars, trucks, buses, off-road vehicles, as well as stationary and marine engines. It should only be used after being appropriately diluted with distilled or soft water.

4L

60L



APPLICATION:

Red coolant G12 Longlife ready-mixed / ready to use Protects the cooling system against corrosion, overheating of the car engine and frost down to -40 degrees C. It is recommended to check the color of the coolant in the expansion tank – fill with the same coolant / color 4L 60L Except for all conventional combustion engines it is also especially good for the high-tech ones, because it provides the so vitally crucial high temperature corrosion protection for the aluminium heat transfer surfaces there. In order to provide good and durable corrosion protection it is recommended to use at least 33 %v/v of brinol® ANTIFREEZE LONG LIFE in distilled water. Typical mixtures are 1:1, offering frost protection at ambient temperatures down to -40°C. Mixtures with more than 70 %v/v brinol® ANTIFREEZE LONG LIFE in water are not recommended.

Brinol[®]

ITEM NO. 1311.59

GOLDEN ANTIFREEZE G13

COOLANT RED G12 – READY-MIXED OR CONCENTRATE

ANTIFREEZE-Concentrate BRINOL ANTIFREEZE-concentrate is a year-round antifreeze solution crafted from ethylene glycol, combined with a carefully chosen selection of silicate-free additives derived from organic (mono and dicarboxylic) acids. This product is designed to protect against freezing, overheating, and corrosion in combustion engines. It is suitable for use in passenger cars, trucks, buses, off-road vehicles, stationary engines, and more.

4L

60L



APPLICATION:

Protects the cooling system against corrosion, overheating of the car engine and frost down to -40 degrees C. It is recommended to check the color of the coolant in the expansion tank – fill with the same coolant / color. It is recommended to use a minimum 33%v/v solution of brinol[®] ANTIFREEZE – concentrate in distilled water in order to obtain a good and durable corrosion protection. The typical water dilution ratio is 1:1, which guarantees protection against freezing at ambient temperatures down to minus 40°C and that will ensure optimum engine cooling. The use of mixtures with more than 70%v/v concentration of brinol[®] ANTIFREEZE – concentrate is not recommended.

Brinol[®]

GREASES



Brinol[®]

ITEM NO. 1312.61

LITHOS 2

LITHIUM BASED GREASE; NLGI-2

1KG
15KG
50KG
180KG



ITEM NO. 1313.61

LITHOPLEX EP 3

LITHIUM-COMPLEX BASED GREASE
WITH EP-ADDITIVES; NLGI-3

1KG
15KG
50KG
180KG



ITEM NO. 1314.61

LITHOPLEX HV 2

LITHIUM-COMPLEX BASED GREASE HIGH
VISCOSITY - WITH EP - ADDITIVES: NLGI-2

1KG
15KG
50KG
180KG



Brinol[®]

ADDITIVES



Brinol[®]

ITEM NO. 1315.63

DIESEL INJECTOR CLEANER



Diesel Injector Cleaner removes carbon deposits from injectors and prevents needles from seizing. Improves the combustion and ignition quality of diesel fuel.

BENEFITS

- Removes carbon deposits from injectors and prevents needles from seizing
- Improves combustion and increases cetane number
- Reduces corrosion and wear
- Decreases operational cost by lowering fuel consumption and maintenance costs
- Reduces engine noise
- Reduces emission of hazardous exhaust gases
- Improves starting performance and eliminates knocking under partial fillings
- Contains a highly effective lubricating agent to lubricate the fuel pump

ITEM NO. 1316.63

DPF CLEANER & REGENERATOR PREMIUM



brinol DPF Cleaner & Regenerator Premium (Ce) is a diesel fuel additive based on cerium-oxide nanoparticles, which is to be used as a catalyst for the regeneration of the diesel particulate filters. TecLub DPF Cleaner & Regenerator Premium (Ce) lowers the ignition temperature of soot collected in the diesel particulate filter and optimizes periodic combustion of accumulated soot. The unique combination of a clean fuel system, clean combustion with lower emissions and catalysed soot particles will clean up and assist in keeping the DPF, the catalytic converter, the exhaust gas recirculation system (EGR) as well as the turbo compressor and its variable geometry vanes clean from deposits.

BENEFITS

- Ensures trouble-free operation of your DPF-system
- Cleans up and keeps your DPF system clean
- Enables quick and complete soot combustion and regeneration
- Prevents DPF clogging
- Cleans the engine, the turbo variable vanes, and exhaust system
- Reduces emission of smoke, HC, CO, and particulate matter
- Improves fuel economy Extends DPF and catalyst service life
- Suitable for use in trucks and buses

Brinol®

ITEM NO. 1318.64

MOTOR OILTREATMENT

ENGINE DOCTOR

ITEM NO. 1317.64

ENGINE FLUSH



Engine Flush is an oil based product used to completely cleanse the interior of the engine from sludge, gum, rust and varnish.



BENEFITS

- Internally cleans and flushes highly the engine with effective cleaning agents
- Eliminates gums, varnish and sludge
- Easily removes contaminants like carbon deposits, soot and liquids (water and fuel rests)
- Reduces fuel consumption and exhaust emissions by restoring engine condition and enabling the fresh oil to perform optimally

ITEM NO. 1317.64

OCTANE BOOSTER



Octane Booster is developed to boost petrol octane number (RON) by 2-5 points, improving combustion and preventing engine knock. Restores power and performance and cleans the fuel intake system.

BENEFITS

- Increases octane number
- Improves combustion and restores performance
- Prevents engine knock
- Prevents exhaust valve seat recession
- Eliminates rough idling and engine hesitation
- Improves fuel economy
- Prevents spark plug fouling



Motor Oil Treatment boosts the engine oil viscosity and strengthens the oil film, preventing metal to metal contact and wear. TecLub Motor Oil Treatment is formulated from high quality base oils and polymers.



BENEFITS

- Increases the viscosity of the engine oil resulting in higher oil pressure and compression.
- Reduces engine wear.
- Prevents engine noise. Brinol MOTOR OIL TREATMENT 250ml
- Reduces oil consumption and blue exhaust smoke.



Brinol®

ITEM NO. 1320.65

OIL STOP LEAK



Stops and prevents oil leakages through seals and eliminates the need for expensive re-pairs.

BENEFITS

- Stops and prevents oil leakages through seals
- Reduces oil consumption
- Makes seals swell back to original size and regain all-new pliability
- Eliminates the need for expensive engine repairs
- Prolongs the service life of the engine
- Improves the viscosity of the motor oil
- Improves engine performance by enhancing motor compression
- Prevents or reduces emission of blue exhaust smoke
- Reduces engine noise
- Reduces emission of hazardous exhaust gases
- Does not contain harmful solvents or solids

ITEM NO. 1321.65

OIL STOP SMOKE



Oil Stop Smoke is formulated to stop exhaust smoke caused by excessive oil burning. The product is based on a combination of chemical polymers, viscosity index improvers, antioxidants, corrosion inhibitors, foamsuppressing agents, and detergent/dispersants.

BENEFITS

- Stops or decreases excessive smoke emission
- Reduces oil consumption
- Extends engine life
- Improves compression
- Improves oil stability and maintains viscosity

ITEM NO. 1320.65

PETROL INJECTOR CLEANER



Petrol Injector Cleaner cleans injectors, valves, and the combustion chamber and keeps the entire petrol supply system clean and in optimal condition. Restores power and performance.

BENEFITS

- Cleans injectors, valves, and the combustion chamber
- Keeps the entire petrol supply system clean and in optimal condition
- Restores power and performance
- Prevents deposits of gums, varnish, and sludge
- Reduces petrol consumption and protects against corrosion
- Improves combustion and drivability
- Eliminates valve sticking (PFI engines)
- Eliminates rough idling, hesitation or knocking
- Reduces emission of hazardous exhaust gases

ITEM NO. 1321.65

VALVE CLEANER



Oil Stop Smoke is formulated to stop exhaust smoke caused by excessive oil burning. The product is based on a combination of chemical polymers, viscosity index improvers, antioxidants, corrosion inhibitors, foamsuppressing agents, and detergent/dispersants.

BENEFITS

- Stops or decreases excessive smoke emission
- Reduces oil consumption
- Extends engine life
- Improves compression
- Improves oil stability and maintains viscosity

Brinol[®]



0045-41444002

www.brinol.eu

info@brinol.com

Headquarters – Administration Taarnfalkevej 16 2650 Hvidovre, Denmark